

Technical Data Sheet

EPI-REZ™ Resin 6520-WH-53

Product Description

EPI-REZ™ Resin 6520-WH-53 is a 53%solids, non-ionic aqueous dispersion of a modified EPON™ Resin 1001 type solid epoxy resin. This resin contains a low level of solvent (acetone and propylene glycol monomethyl ether) and is designed to provide the high performance of traditional epoxy coatings in low VOC, non-HAP waterborne coatings. Although EPI-REZ Resin 6520-WH-53 exhibits good compatibility with many water-reducible amine curing agents, it is designed for use with EPIKURE™ Curing Agent 6870-W-53.

Benefits

EPI-REZ Resin 6520-WH-53 offers:

- Very low odor
- Ultra low VOC
- Mechanical stability – pigmented with high speed dispersers
- Non-flammable/non-combustible (flash point > 200 °F)

In combination with EPIKURE Curing Agent 6870-W-53 over a typical range of stoichiometry levels, this epoxy resin dispersion system delivers:

- Very fast dry and recoat times
- No induction time
- Visible end of pot life
- Very good gloss and aesthetics
- Very good corrosion and water resistance
- Balanced overall performance properties

Sales Specifications

Property	Value	Unit	Test Method
Solids	52 - 54.5	%	ASTMD1259
Viscosity	1000 - 6000	cP	ASTMD2196
Weight per Epoxide	500 - 600	g/eq	ASTMD1652

Typical Properties

Property	Value	Unit
Appearance	Opaque white liquid	
Density Solids	9.7	lbs/gal
Density Solution	9	lbs/gal

Processing/How to use

General Information

The preferred choice of curing agent for optimum performance over a wide range of stoich-iometries is EPIKURE Curing Agent 6870-W-53. This versatile binder system — EPI-REZ Resin 6520-WH-53 with EPIKURE Curing Agent 6870-W-53 — allows clear coats, enamels and primers to be formulated with volumetric mix ratios from 4:1 to 1:1. In addition, EPI-REZ Resin 6520-WH-53 is compatible with many other waterborne epoxy curatives and additives.

EPI-REZ Resin 6520-WH-53
<http://www.westlakeepoxy.com/en-US/product/epi-rez-resin-6520-wh-53>


Generated: May 24, 2022
 Issue Date:
 Revision: 8/20/2018 2:00:00 AM

© and ™ Licensed trademarks of Westlake Inc.

The information provided herein was believed by Westlake Inc. ("Westlake") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Westlake Epoxy are subject to Westlake Epoxy's terms and conditions of sale. **WESTLAKE MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY WESTLAKE**, except that the product shall conform to Westlake's specifications. Nothing contained herein constitutes an offer for the sale of any product.

Performance Properties

Figure 1 / EPI-REZ Resin 6520-WH-53 Viscosity vs. Temperature, @ 20 rpm & 50 rpm

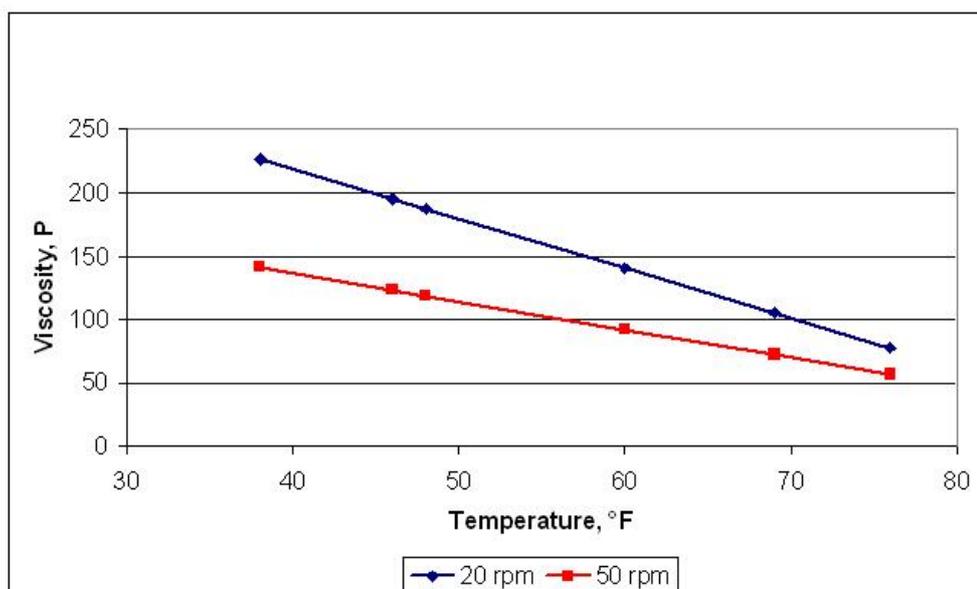

Safety, Storage & Handling

Please refer to the SDS for the most current Safety and Handling information.

Please refer to the Hexion web site for Shelf Life and recommended Storage information.

For ease of handling and optimum shelf life, epoxy dispersions should be stored in tightly sealed containers at temperatures between 50°F (10°C) and 100 °F (37.8 °C). Do not allow the product to freeze. To prevent skinning or surface drying, do not leave the product uncovered for extended periods of time. If the need arises to store partially filled drums, replace the plastic top-sheet onto the surface of the liquid product. With extended storage or shipping, some settling may occur. In general, material should be lightly and thoroughly agitated before use to ensure uniformity.

Exposure to these materials should be minimized and avoided, if feasible, through the observance of proper precautions, use of appropriate engineering controls and proper personal protective clothing and equipment, and adherence to proper handling procedures. None of these materials should be used, stored, or transported until the handling precautions and recommendations as stated in the Safety Data Sheet (SDS) for these and all other products being used are understood by all persons who will work with them. Questions and requests for information on Hexion Inc. ("Hexion") products should be directed to your Hexion sales representative, or the nearest Hexion sales office. Information and SDSs on non-Hexion products should be obtained from the respective manufacturer.

Packaging

Available in bulk and drum quantities.

Contact Information

For product prices, availability, or order placement, visit the "Contact Us" section of our website. For literature and technical assistance, visit our website at www.Hexion.com/epoxy