



# Southeastern Performance Minerals, LLC

## NCDG-60

### General Description


NCDG-60 is a dry ground muscovite mica, processed specifically for industrial applications. Proprietary milling and air classification induces a high degree of delamination and controlled coarse end particle size. These characteristics make NCDG-60 an acceptable alternative to higher cost wet ground products.

Roof Coatings  
Mold Releases  
Foundry Coatings  
Gaskets

Plastics  
Paints & Coatings  
Cultured Stone  
Sound Deadening

### Typical Properties

Sieve Analysis	% retained
+100 mesh	<0.5
+325 mesh	35-45
Bulk Density (Colgate)	12-16
Mean Particle Size ( $\mu\text{m}$ )	57-63
Color, L* value	>78
Moisture Loss @ 100°C	<0.5%
Specific Gravity	2.82
pH	6.0-7.5
CAS No.	12001-26-2

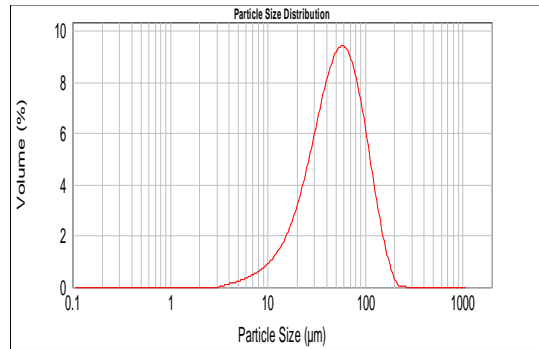

See SDS for safety and regulatory information.

Southeastern Performance Minerals, LLC  
1132 Veal Rd.  
Sandersville, GA 31082

Phone: (478)553-0048  
Fax: (478)553-0050  
info@sepm.us

The statements herein are based on data which is believed to be reliable. This data is offered in good faith and typical of normal production. SEPM make no warranty or representation, expressed or implied, regarding the accuracy of this data or the use of this product. The user is solely responsible for the use of this product.

Issue date: 1/1/19

Revised date: 1/1/19